


CNLD® 利达

PRODUCTS CATALOGUE

产品选型手册

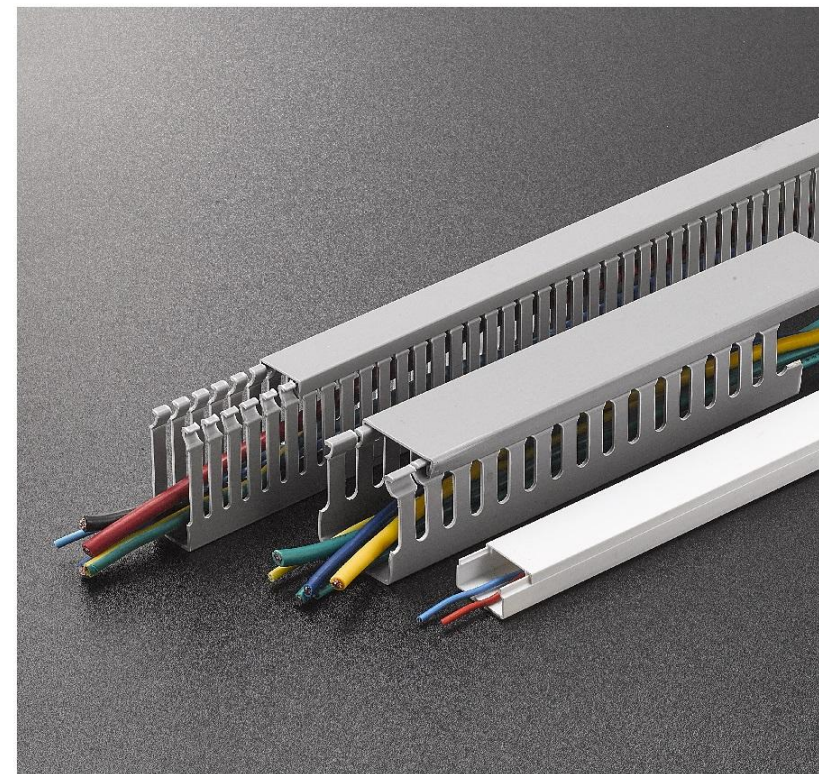

乐清市利达锁具有限公司
YUEQING LIDA LOCK CO., LTD.

CNLD® 利达

CNLD® 利达

Mailing Add: No. 18, Zhenxing Road, Xinguang Industrial Zone, Liushi, Yueqing, Zhejiang, China

Tel.: +86 18757075690 / 13706778529

Fax.: +86 0577-62758363

Email: lidalock@lidalock.com

Web.: www.cnlidalock.com



Yueqing Lida Lock Co., Ltd., founded in the 1980s, is a comprehensive enterprise integrating technology, industry and trade. The company is located in Lishui, which enjoys the reputation of "Electric Capital", and has convenient transportation. After more than 20 years of continuous improvement and continuous improvement, we have advanced production equipment and an elite team with more than hundreds of professional and technical personnel. Yueqing Lida Lock is dedicated to producing various MS300-900 series high and low voltage switch cabinet door locks, electrical box door locks, instrument cabinet door locks, communication cabinet door locks and other cabinet door locks and hinges. It is a professional manufacturer integrating product research, development, production and sales, from product design and mold making, Product die-casting, stamping, surface treatment to assembly, and strict inspection and control of each process. All employees of Leader adhere to the service tenet of "Customer Satisfaction", and providing customers with "zero defect" products is the unremitting goal of each employee of the company. Leader always holds quality first, service first, and serves customers. Create value concept, provide customers with multiple solutions to meet the different needs of customers, at the same time strive to improve internal competitiveness, and provide customers with products on time, quality and quantity. In the end, we will achieve a win-win situation for our customers and us.

Chairman of Lida Locks: Xu Jiansheng sincerely welcomes your presence and cooperation here!

企业简介

Company Profile

乐清市利达锁具有限公司, 创建于 80 年代, 是一家集科技、工业、贸易于一体的综合性企业。公司坐落于享有“电器之都”美称的柳市, 交通便利。经过二十几年的持续改进和不断完善, 拥有先进的生产设备, 并拥有了一支具有数百多个专业技术人员的精英团队。

乐清市利达锁具公司专心致力于生产各种 MS300-900 系列高、低压开关柜门锁, 配电箱门锁, 仪表柜门锁、通讯柜门锁等柜体的门锁、铰链等柜附件, 是集产品研发、开发、生产、销售于一体的专业厂家, 从产品设计、模具制作、产品压铸、冲制、表面处理到装配, 对每一个环节各工序进行严格的检测和管控。利达所有员工坚持“顾客满意”的服务宗旨, 为顾客提供“零缺陷”的产品是公司每位员工始终不渝的奋斗目标, 利达人始终抱着质量第一、服务第一、为客户创造价值理念, 为客户提供多种解决方案, 满足客户的不同需求, 同时努力提高内部竞争力, 按时、保质、保量为客户提供产品。最终实现客户和我们的双赢。


利达锁具董事长: 徐建胜在这里真诚的欢迎您的光临与合作!




Product introduction

Functional characteristics


- Using South Asia Solid PVC, best insulation, flammability class UL94V-0, temperature-resistant 85 °C
- It consists of two parts: slot base and slot cover, there are wire holes on both sides of the slot base.
- The slot cover adopts an anti-separation design
- Standard length 2m , can customization with customer dimension



出线孔尺寸 (mm) Outlet hole size (mm)

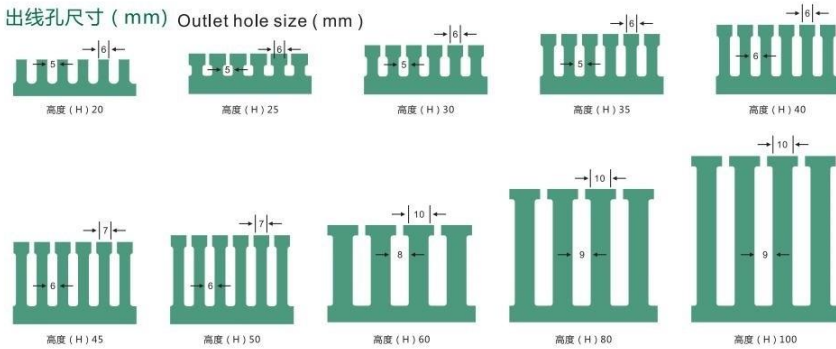

安装尺寸 (mm) Installation size (mm)

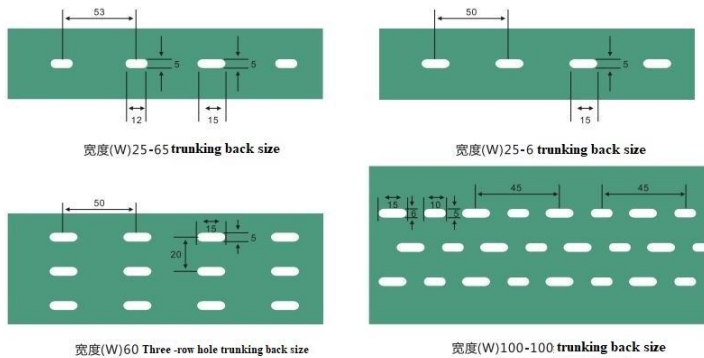

Product Gray trunking parameter

Material: south Asia hard PVC, good insulation, no spontaneous combustion, temperature resistance to 85 °C.

Structure: it consists of groove bottom and groove cover, and wire holes are set on both sides of the groove bottom.



型号规格 (高H×宽W) PXC3	孔距 Pitch	齿 宽 Tooth width	单价/米 Unit price /meter	包装数量 Number of packages
20×15	5	7		100
20×20	5	7		100
20×25	5	7		100
20×30	5	7		100
25×25	5	7		100
25×35	5	7		100
30×15	5	7		100
30×20	5	7		100
30×25	5	7		100
30×30	5	7		100
30×35	5	7		100
30×40	5	7		100
30×45	5	7		100
30×50	5	7		100
35×25	5	7		100
35×30	5	7		100
33×33	5	7		100
35×40	5	7		100
35×50	5	7		100
40×25	6	8		100
40×30	6	8		100
40×35	6	8		100
40×40	6	8		100
40×45	6	8		100
40×50	6	8		100
40×60	6	8		100
45×25	6	8		100
45×30	6	8		100
45×45	6	8		100
45×65	6	8		100
50×20	6	8		100
50×25	6	8		100
50×30	6	8		100
50×35	6	8		100

Product parameter

Gray trunking

Material: south Asia hard PVC, good insulation, no spontaneous combustion, temperature resistance to 85 °C.
Structure: it consists of groove bottom and groove cover, and wire holes are set on both sides of the groove bottom.

型号规格 (高H×宽W) PXC3	孔距 Pitch	齿 宽 Tooth width	单价/米 Unit price / meter	包装数量 Number of packages
50×40	6	8		100
50×45	6	8		100
50×50	6	8		100
50×55	6	8		100
50×60	6	8		100
50×80	6	8		60
50×100	6	8		60
60×25	6	8		100
60×30	6	8		100
60×35	6	8		100
60×40	6	8		100
60×45	6	8		100
60×50	6	8		100
60×60	6	8		80
60×80	6	8		60
60×100	6	8		48
65×25	8	10		100
65×33	4	6		
65×45	8	10		100
65×65	8	10		60
80×25	8	10		60
80×35	8	10		60
80×40	8	10		60
80×45	8	10		60
80×50	8	10		60
80×55	8	10		60
80×60	8	10		60
80×80	8	10		48
80×100	8	10		36
100×33	8	10		60
100×40	8	10		60
100×50	8	10		60
100×60	8	10		48
100×70	8	10		48
100×80	8	10		36
100×100	8	10		36



Product parameter

Blue trunking

Material: south Asia hard PVC, good insulation, no spontaneous combustion, temperature resistance to 85 °C.
Structure: it consists of groove bottom and groove cover, and wire holes are set on both sides of the groove bottom.

型号规格 (高H×宽W) PXC3	孔距 Pitch	齿 宽 Tooth width	单价/米 Unit price / meter	包装数量 Number of packages
20×15	5	7		100
20×20	5	7		100
20×25	5	7		100
20×30	5	7		100
25×25	5	7		100
25×35	5	7		100
30×15	5	7		100
30×20	5	7		100
30×25	5	7		100
30×30	5	7		100
30×35	5	7		100
30×40	5	7		100
30×45	5	7		100
30×50	5	7		100
35×25	5	7		100
35×30	5	7		100
33×33	5	7		100
35×40	5	7		100
35×50	5	7		100
40×25	6	8		100
40×30	6	8		100
40×35	6	8		100
40×40	6	8		100
40×45	6	8		100
40×50	6	8		100
40×60	6	8		100
45×25	6	8		100
45×30	6	8		100
45×33	6	8		100
45×45	6	8		100
45×65	6	8		100
50×20	6	8		100
50×25	6	8		100
50×30	6	8		100
50×35	6	8		100



Product parameter

Blue trunking

Material: south Asia hard PVC, good insulation, no spontaneous combustion, temperature resistance to 85 °C.

Structure: It consists of groove bottom and groove cover, and wire holes are set on both sides of the groove bottom.

型号规格 (高H×宽W) PXC3	孔距 Pitch	齿 宽 Tooth width	单价/米 Unit price / meter	包装数量 Number of packages
50×40	6	8		100
50×45	6	8		100
50×50	6	8		100
50×55	6	8		100
50×60	6	8		100
50×80	6	8		60
50×100	6	8		60
60×25	6	8		100
60×30	6	8		100
60×35	6	8		100
60×40	6	8		100
60×45	6	8		100
60×50	6	8		100
60×60	6	8		80
60×80	6	8		60
60×100	6	8		48
65×25	8	10		100
65×33	4	6		
65×45	8	10		100
65×65	8	10		60
80×25	8	10		60
80×35	8	10		60
80×40	8	10		60
80×45	8	10		60
80×50	8	10		60
80×55	8	10		60
80×60	8	10		60
80×80	8	10		48
80×100	8	10		36
100×33	8	10		60
100×40	8	10		60
100×50	8	10		60
100×60	8	10		48
100×70	8	10		48
100×80	8	10		36
100×100	8	10		36



Product parameter

Extra-thick dark gray trunking

Material: south Asia hard PVC, good insulation, no spontaneous combustion, temperature resistance to 85 °C.

Structure: It consists of groove bottom and groove cover, and wire holes are set on both sides of the groove bottom.

The following products can be customized

型号规格 (高H×宽W) PXC3	孔距 Pitch	齿 宽 Tooth width	单价/米 Unit price / meter	包装数量 Number of packages
20×15	4/5	6/7		100
20×20	4/5	6/7		100
20×25	4/5	6/7		100
20×30	4/5	6/7		100
25×25	4/5	6/7		100
25×35	4/5	6/7		100
30×15	4/5	6/7		100
30×20	4/5	6/7		100
30×25	4/5	6/7		100
30×30	4/5	6/7		100
30×35	4/5	6/7		100
30×40	4/5	6/7		100
30×45	4/5	6/7		100
30×50	4/5	6/7		100
35×25	4/5	6/7		100
35×30	4/5	6/7		100
33×33	4/5	6/7		100
35×40	4/5	6/7		100
35×50	4/5	6/7		100
40×25	4/6	6/8		100
40×30	4/6	6/8		100
40×35	4/6	6/8		100
40×40	4/6	6/8		100
40×45	4/6	6/8		100
40×50	4/6	6/8		100
40×60	4/6	6/8		100
45×25	4/6	6/8		100
45×30	4/6	6/8		100
45×33	4/6	6/8		100
45×45	4/6	6/8		100
45×65	4/6	6/8		100
50×20	4/6	6/8		100
50×25	4/6	6/8		100
50×30	4/6	6/8		100
50×35	4/6	6/8		100

Product

parameter **Extra-thick dark gray trunking**

Material: south Asia hard PVC, good insulation, no spontaneous combustion, temperature resistance to 85 °C.
Structure: it consists of groove bottom and groove cover, and wire holes are set on both sides of the groove bottom.

The following products can be customized

型号规格 (高H×宽W) PXC3	孔距 Pitch	齿 宽 Tooth width	单价/米 Unit price / meter	包装数量 Number of packages
50×40	4/6	8		100
50×45	4/6	8		100
50×50	4/6	8		100
50×55	4/6	8		100
50×60	4/6	8		100
50×80	4/6	8		60
50×100	4/6	8		60
60×25	4/6	8		100
60×30	4/6	8		100
60×35	4/6	8		100
60×40	4/6	8		100
60×45	4/6	8		100
60×50	4/6	8		100
60×60	4/6	8		80
60×80	4/6	8		60
60×100	4/6	8		48
65×25	4/8	10		100
65×33	4	6		
65×45	4/8	10		100
65×65	4/8	10		60
80×25	8	10		60
80×35	8	10		60
80×40	8	10		60
80×45	8	10		60
80×50	8	10		60
80×55	8	10		60
80×60	8	10		60
80×80	8	10		48
80×100	8	10		36
100×33	8	10		60
100×40	8	10		60
100×50	8	10		60
100×60	8	10		48
100×70	8	10		48
100×80	8	10		36
100×100	8	10		36



Product

White trunking for decoration parameter

Material: south Asia hard PVC, good insulation, no spontaneous combustion, temperature resistance to 85 °C.
Structure: it consists of groove bottom and groove cover, and wire holes are set on both sides of the groove bottom.

型号规格 (高H×宽W) PXC3	单价/米 Unit price / meter	包装数量 Number of packages
10×20		100
10×15		100
10×25		100
15×15		100
15×20		100
15×25		100
15×35		100
15×40		100
20×30		100
20×35		100
20×40		100
20×50		100
25×40		100
25×50		100
25×55		100
30×50		100
30×60		100
30×80		60
30×100		60
40×40		100
40×60		100
50×75		60
50×80		60
50×100		60
60×40		100
60×60		80
60×100		48
80×80		48
80×100		36
100×100		36